


Masport[®] HXL-Series II Vacuum / Pressure Pumps

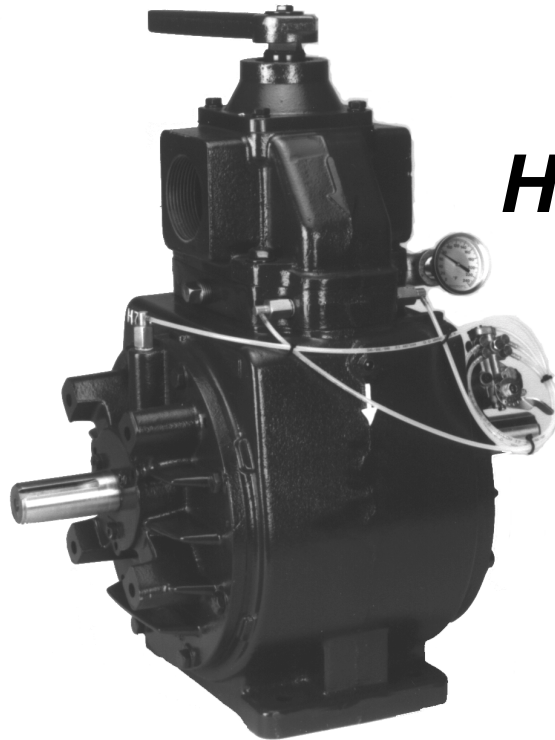

HXL75WV

◆ Mechanical Oil Pump

- Automatic Oiling.
- No Adjustment Required.
- Delivers Right Amount of Oil at All Working Levels.

◆ End Thrust Protection

- Prevents Rotor-to-Endcover Contact Created by Direct P.T.O. Drive or Misaligned Belt Driven Systems.

◆ Double End Shaft

- Accommodates Clockwise or Counter-Clockwise Drive Systems.

◆ Liquid Cooled Design

- Prevents Winter Freeze-ups.
- Allows Pumps to Operate @ 25" Hg Continuously.
- Reliable Operation Under Extreme Hot or Cold Weather Conditions.

◆ Integral Valve

- Allows Pump to Operate in Vacuum and Pressure Mode.
- Reduces Plumbing and Installation Costs.

◆ Masport Quality & Performance

- Achieve Minimum of 27" Hg (Intermittent).
- Precise Machining and Assembly.
- Heavy Duty Bearings.
- Viton Oil Seals for Longer Service Life.
- Vanes are Heat Stabilized and Machined to Exacting Tolerances for Superior Ruggedness and Durability.
- Easy to Service.
- Superior Pump Life.

◆ Performance Warranty

- One Year Warranty.

Masport[®]

PERFORMANCE DATA

Performance Data – Vacuum

Pump R.P.M.	Displacement C.F.M.	S.C.F.M. and A.C.F.M. @ VACUUM											Maximum Vacuum – "Hg	
			5	10	15	18	20	22	24	25	26	27	Continuous	Intermittent
1100	196	SCFM	140	110	79	61	47	36	22	15	9	3	25	27
		ACFM	168	165	158	152	142	134	111	92	66	30		
1275	230	SCFM	162	127	92	71	55	43	26	18	10	3.5	25	27
		ACFM	195	190	184	177	164	160	129	108	77	35		

Performance Data – Pressure

Pump R.P.M.	Displacement C.F.M.	S.C.F.M. @ P.S.I.G.						Maximum Pressure – P.S.I.G.		
		5	10	15	18	20	25	30	Continuous	Intermittent
1100	196	168	160	152	143	134	127	119	20	35
1275	230	193	184	175	165	154	146	136	20	35

Horsepower Required @ P.S.I.G.


Pump R.P.M.	S.C.F.M. @ P.S.I.G.						
	5	10	15	20	25	30	35
1100	9.7	12.5	15.6	18.4	21.7	25.6	27.5
1250	11	14.2	17.7	20.9	24.6	29.1	31.3

Horsepower Required @ "Hg


Pump R.P.M.	Vacuum "Hg				
	5	10	15	20	27
1100	6.9 HP	8.1 HP	8.6 HP	9.6 HP	10.8 HP
1250	7.8 HP	9.2 HP	9.7 HP	10.9 HP	12.3 HP

DIMENSIONAL DATA

HXL75WV Pump

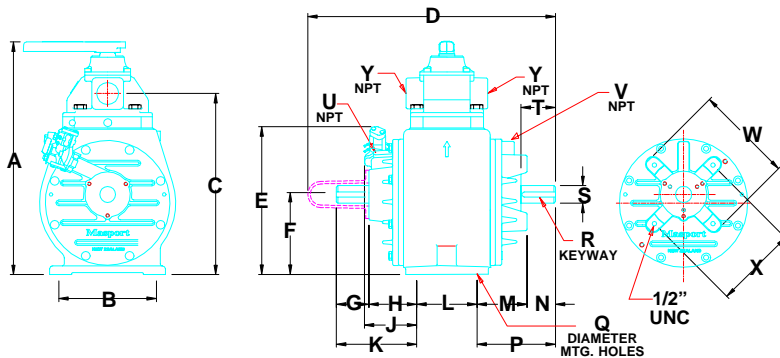


HXL75WF Pump

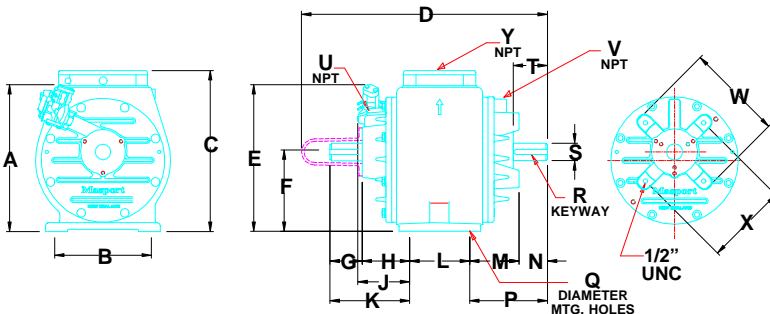

	HXL75WV	HXL75WF
A	22 3/4	12 5/8
B	8 5/8	8 5/8
C	16 29/32	14 11/32
D	21 1/8	21 1/8
E	12 5/8	12 5/8
F	7 1/2	7 1/2
G	3 25/32	3 25/32
H	4 3/8	4 3/8
J	5 5/32	5 5/32
K	8 5/32	8 5/32
L	4 13/16	4 13/16
M	4 17/32	4 17/32
N	3 5/8	3 5/8
P	8 5/32	8 5/32
Q	9/16	9/16
R	5/16 x 5/16 x 2	5/16 x 5/16 x 2
S	1 3/8	1 3/8
T	3 5/8	3 5/8
U	1/8	1/8
V	1/4	1/4
W	8 15/32	8 15/32
X	7 1/4	7 1/4
Y	2 1/2	2

ALL DIMENSIONS IN INCHES.

For additional information on these quality Masport Vacuum / Pressure Pumps contact:



MASPORT INCORPORATED

6140 McCormick Drive
 Lincoln, Nebraska 68507
 402-466-8428 FAX: 402-466-8355
 E-Mail: masport.sales@ALLTEL.NET
CALL TOLL FREE 800-228-4510

